

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as “EZVIZ”). This user manual (hereinafter referred to as “the Manual”) cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.

About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the EZVIZ™ website (<http://www.ezviz.com>).

Revision Record

New release – January, 2024

Trademarks Acknowledgement

EZVIZ™, ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED “AS IS”, WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

Table of Contents

Attention	1
Overview	1
1. Package Contents	1
2. Basics	2
Setup.....	4
1. Get the EZVIZ App.....	4
2. Installation.....	5
3. Add the peephole to EZVIZ App	7
Maintenance.....	8
1. Charge the Panel	8
2. Restore to Factory Settings	8
View Your Device on the EZVIZ App.....	9
1. Live View.....	9
2. Settings.....	10
Initiatives on the Use of Video Products.....	11
Appendix	12
1. Rechargeable Lithium ion Battery	12
2. INFORMATION FOR PRIVATE HOUSEHOLDS	12

Attention

- Do not expose the camera to the harsh environment like high temperature, humid, salt mist or rain, otherwise, the device may be damaged.
- Do not press the sensor or lens of the camera, otherwise, the device may be damaged.
- Do not pull the wire of the camera hard, and protect yourself from being cut by the wire. Damage to the wire due to inappropriate operation is not included in the warranty.
- Use the exclusively power adapter to charge the panel, otherwise, the system may be damaged.

Overview

1. Package Contents



or



Panel (x1)



or



Camera (x1)



Mounting Base (x1)



Spare Adhesive Backing
for Camera (x1)



Screws (x8)



Power Cable (x1)



Regulatory Information (x2)




Quick Start Guide (x1)

- The device's appearance(color) is subject to the one you have bought.
- The following description takes the silver HP2 as an example.


2. Basics

Panel

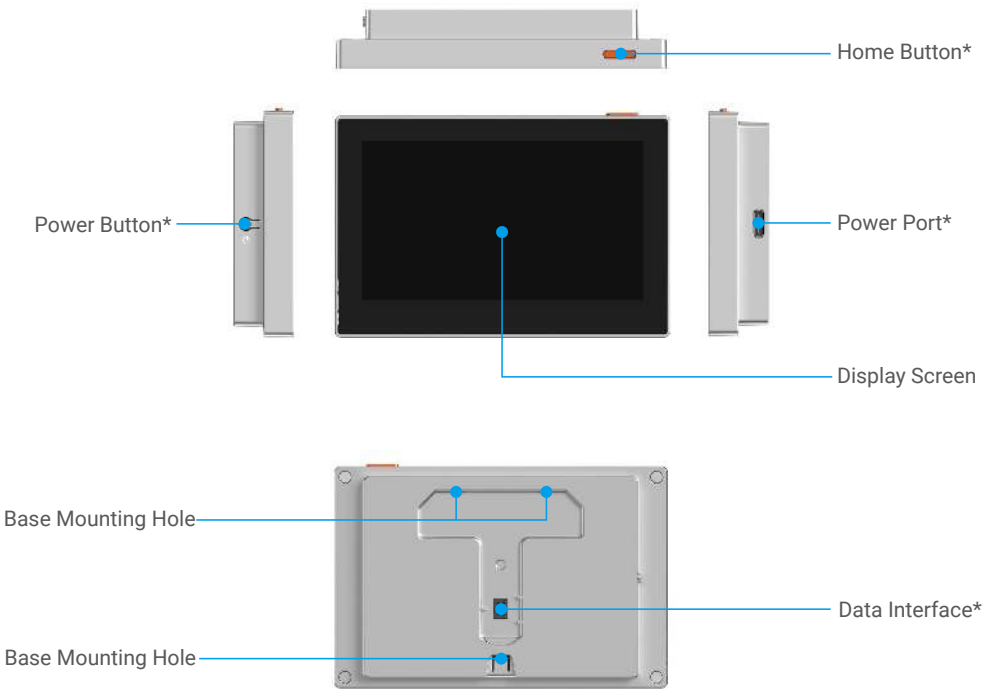


Name	Description
Power Button	• Power on: Press for 1 second to power on the camera in shut-down state. • Power off: Press and hold for 3 seconds to power off the camera. • When operating on the panel page, the button can be used for confirmation.
Home Button	• Press the home button once to enter the live view screen. • Press and hold the home button for 3 seconds to restart and set all parameters to default. • When operating on the panel page, the button can be used for selecting menu.
Power Port	For charging the camera.
Data Interface	Connect with the data wire of the camera.

Camera

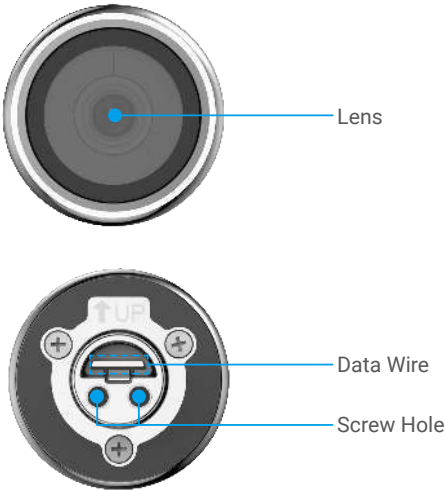

Mounting Base

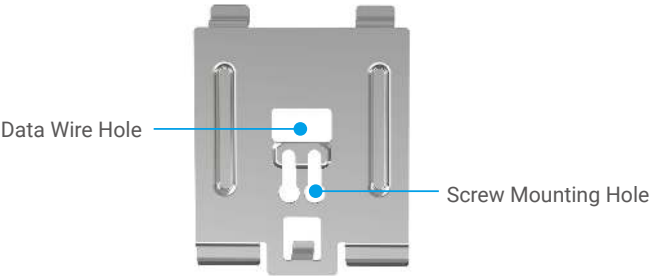


Setup

Follow the steps to set your peephole:

- 1. Get the EZVIZ app, and log in to your EZVIZ app account.
- 2. Install your peephole.
- 3. Power on your peephole.
- 4. Add your peephole to your EZVIZ account.

1. Get the EZVIZ App

- 1. Connect your mobile phone to Wi-Fi using your 2.4GHz network (suggested).
- 2. Download and install the EZVIZ app by searching “EZVIZ” in the App Store or Google PlayTM.
- 3. Launch the app and register an EZVIZ user account.

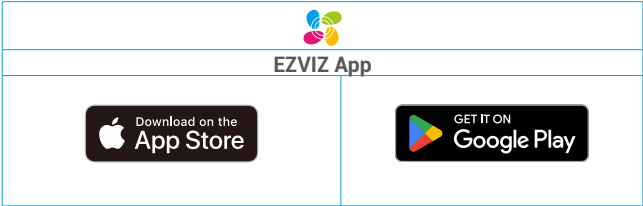

i If you have already used the app, please make sure that it is the latest version. To find out if an update is available, go to the app store and search for EZVIZ.

2. Installation

If you already have a peephole, install the device in the same place. If not, please drill a hole of diameter about 14mm (no more than 26mm) and about 145cm distance from the ground to have a good viewing effect.

1



Measure the door's thickness and select the appropriate screws.

Thickness	Screw
35 to 53mm	
53 to 70mm	
70 to 88mm	
88 to 105mm	

2



Turn the screws into the back of camera.


i Just fix it, no tightening required.

3




Tear off the release paper.

4

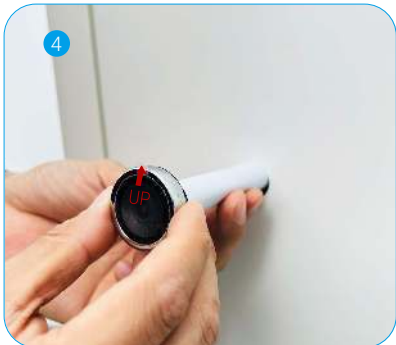


Pass screws and wire through the door. You can roll up the paper to help.

5

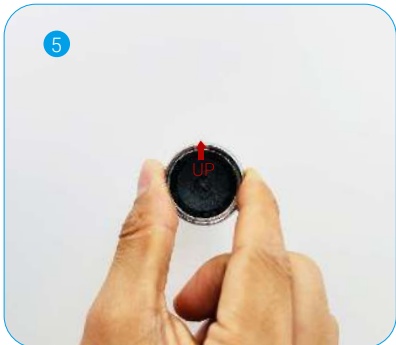

Adjust the camera's position so that the red triangle tag is facing upwards and push it close to the door gently.

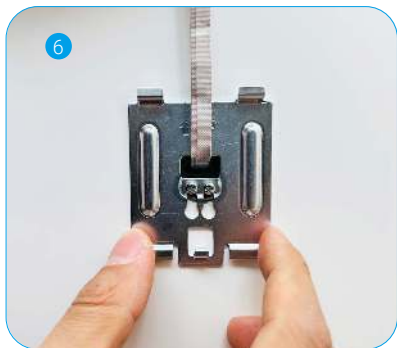


Pass screws and wire through the mounting base.



Adjust the mounting base's position and tighten the screws.



Press the power button for 1s to power on the panel.

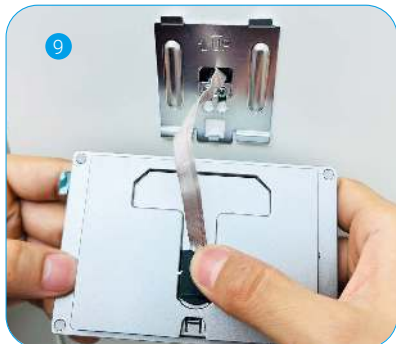

Connect the panel with the camera's wire.




Align the base mounting hole of the panel with the top of the mounting base then press it down into the base.




Remove the protective film. Installation complete.

3. Add the peephole to EZVIZ App

1. If you did not power on the panel in the previous chapter, press and hold the power button for 1s to turn it on.



2. Press the power button for 1s to power on the panel. Press the home button to choose the language and press the power button to confirm.

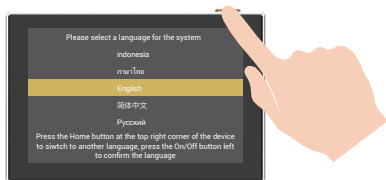

3. On your smartphone, log in to your EZVIZ app account.
4. On the Home screen, tap "+" on the upper-right corner to go to the Scan QR Code interface.
5. Scan the QR code on the screen of the panel.



6. Follow the EZVIZ app wizard to finish Wi-Fi configuration.


i If you failed to get the QR code or want to reconfigure Wi-Fi, please hold the Home button for 3 seconds to reset and repeat the steps above. You can also scan the the QR code on the back of the panel to add the peephole.

Maintenance

1. Charge the Panel

Connect the panel with the power outlet via power adapter (5V 2A, sold separately).

-  You can also take off the panel from the mounting base to charge. Please be careful when disconnecting the wire.
- Please do not charge the device when the temperature exceeds 45 degrees or below 0 degrees.

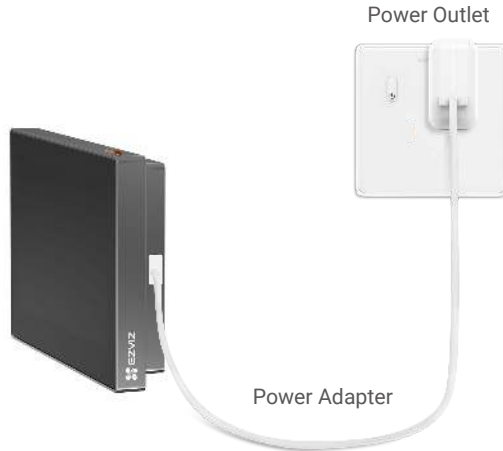

2. Restore to Factory Settings

When the device is normally running, press and hold the home button for 3 seconds to restore the device to factory settings.

View Your Device on the EZVIZ App

1. Live View

i The app interface may be different due to version update, and the interface of the app you installed on your phone shall prevail.

Launch the EZVIZ app, tap Live View button, you can view a live feed, take snapshots, record videos, and choose video definition as needed.



Icon	Description
	Battery. View the remaining battery capacity.
	Share. Share your device.
	Settings. View or change the device settings.
	Snapshot. Take a snapshot.
	Record. Manually start/stop recording.
	Definition. Select video resolution as you needed.
	Nearby Device. Tap to check available devices nearby.
	Full Screen Display. Tap to enjoy a full screen display for your field of view.

i Please refer to the actual interface for specific information.

2. Settings

In the settings page, you can set the parameters of the device.

Parameter	Description
Name	View or tap to customize the name of your device here.
Battery	You can see the battery remaining capacity here and the charging method.
Message Notification	You can manage the offline notification for your device.
Image Settings	You can set relevant image parameters for your device.
Screen Settings	You can set relevant screen parameters for your device.
Privacy Settings	You can encrypt your videos with encryption password and customize the privacy area.
Network Settings	You can see the Wi-Fi that the device has connected to.
Device Information	You can see the device information here.
Share Device	You can share the device to you family members or guests.
Delete Device	Tap to delete the camera from EZVIZ app.

Initiatives on the Use of Video Products

Dear Valued EZVIZ Users,

Technology affects every aspect of our life. As a forward-looking tech company, we are increasingly aware of the role technology plays in improving efficiency and quality of our life. At the same time, we are also aware of the potential harm of its improper usage. For example, video products can record real, complete and clear images, therefore they hold great values in representing facts. Nevertheless, improper distribution, use and/or processing of video records may infringe on the privacy, legitimate rights and interests of others.

Committed to innovating technology for the good, we at EZVIZ hereby earnestly advocate that every user shall use video products properly and responsibly, thus to collectively create a positive environment where all related practices and usage comply with applicable laws and regulations, respect individuals' interests and rights, and promote social morality.

Here are EZVIZ's initiatives that we'd appreciate your attention:

1. Each individual possesses a reasonable expectation of privacy, and the use of video products should not be in conflict with such reasonable expectation. Therefore, a warning notice which clarifies the monitoring range should be displayed in a reasonable and effective manner, when installing video products in public areas. For non-public areas, the rights and interests of people involved shall be evaluated thoughtfully, including but not limited to, installing video products only after obtaining the consent of the stakeholders, and not installing highly-invisible video products without other's knowledge.

2. Video products objectively records footage of real activities within specific time and space. Users shall reasonably identify the people and rights involved in this scope in advance, to avoid any infringement of portrait, privacy or other legal rights of others while protecting themselves through video products. Notably, if you choose to enable the audio recording function on your camera, it will capture sounds, including conversations, within the monitoring range. We highly recommend a comprehensive assessment on the potential sound sources in the monitoring range, so as to fully understand the necessity and the reasonableness before you turn on the audio recording function.

3. Video products in use will consistently generate audio or visual data from real scenes –possibly including biometric information such as facial images – based on the user's selection of product features. Such data can be used or processed to use. Video products are only technological tools that do not and cannot humanly practice legal and moral standards to guide lawful and proper use of data. It is the methods and purposes of the people who control and use the generated data that make a difference. Therefore, data controllers shall not only strictly abide by applicable laws and regulations, but also fully respect non-obligatory rules including international conventions, moral standards, cultural norms, public order and local customs. Furthermore, we should always prioritize the protection of privacy and portrait rights, and other reasonable interests.

4. The video data continuously generated by video products carries the rights, values and other demands of various stakeholders. Thus, it is extremely crucial to ensure data security and shield the products from malicious intrusions. Every user and data controller shall, undertake all reasonable and necessary measures to maximize product and data security, avoiding data leakage, improper disclosure or misuse, including but not limited to, setting up access control, selecting a suitable network environment where video products are connected, establishing and constantly optimizing network security.

5. Video products have made great contributions to enhance the safety of our society, and we believe that they will continue to play a positive role in various aspects of our daily life. Any attempt to abuse these products to violate human rights or engage in unlawful activities contradicts the very essence of the value in tech innovation and product development. We encourage every user to establish your own methods and rules to evaluate and monitor the use of video products, so as to ensure that these products are always used properly, thoughtfully and with goodwill.

1. Rechargeable Lithium ion Battery

- 1. The battery type of the device: Portable battery.
- 2. The battery of this device is non-removable, which is risky to remove.

Chemical Composition	CAS No.	Weight (%)	Chemical Formula
Lithium Cobalt Oxide	12190-79-3	37.82%	CoLiO ₂
Polyvinylidene fluoride	24937-79-9	1.46%	C ₂ H ₂ F ₂
Aluminum	7429-90-5	9.03%	Al
Copper Foil	7440-50-8	7.12%	Cu
Graphite	7782-42-5	16.48%	CH ₄
Styrene Butadiene rubber	61789-96-6	0.39%	C ₃₆ H ₄₂ X ₂
Carboxymethylcellulose	9000/11/7	0.31%	C ₆ H ₁₆ O ₈
Copper	7440-50-8	9.74%	Cu
Nickel	7440-02-0	1.08%	Ni
Lithium Hexafluorophosphate	21324-40-3	18.56%	F ₆ LiP
Polyethylene	9002-88-4	3.03%	(C ₂ H ₄) _n
Nylon	24937-16-4	0.8%	(C ₁₂ H ₂₃ NO) _n
Polypropylene	9003-07-0	1.3%	(C ₃ H ₆) _n

2. INFORMATION FOR PRIVATE HOUSEHOLDS

1. Separate collection of waste equipment: Electrical and electronic equipment that has become waste is referred to as waste equipment. Owners of waste equipment must dispose of it separately from unsorted municipal waste. In particular, waste equipment does not belong in household waste, but in special collection and return systems.
2. Batteries and rechargeable batteries as well as lamps: Owners of waste equipment shall, as a rule, separate waste batteries and rechargeable batteries that are not enclosed in the waste equipment, which can be removed from the waste equipment without being destroyed, from the waste equipment before handing them in at a collection point. This does not apply if waste equipment is prepared for reuse with the participation of a public waste management authority.
3. Options for returning waste equipment: Owners of waste equipment from private households can return it free of charge to the collection points of the public waste management authorities or to the take-back points set up by manufacturers or distributors within the meaning of the Electrical and Electronics Equipment Law. Stores with a sales area of at least 400 m² for electrical and electronic equipment and those grocery stores with a total sales area of at least 800 m² that offer electrical and electronic equipment several times a year or on a permanent basis and make it available in the market are required to take it back. This also applies in the case of distribution using means of distance communication, if the storage and shipping areas for electrical and electronic equipment are at least 400 m² or the total storage and shipping areas are at least 800 m². Distributors shall, in principle, ensure take-back by providing suitable return facilities at a reasonable distance from the respective end user. The possibility of returning waste equipment free of charge exists for distributors who are obliged to take it back, among other things, if a new similar device that essentially fulfills the same functions is delivered to an end user.
4. Privacy Notice: Waste equipment often contains sensitive personal data. This applies in particular to devices of information and telecommunications technology such as computers and smartphones. In your own interest, please note that each end user is responsible for deleting the data on the waste equipment to be disposed of.
5. Meaning of the symbol "crossed-out wheelee bin": The symbol of a crossed-out wheelee bin regularly depicted on electrical and electronic equipment indicates that the respective device is to be collected separately from unsorted municipal waste at the end of its service life.