


Twisted Pair Patch Cable, Raw - Category 6 Class E - U/UTP

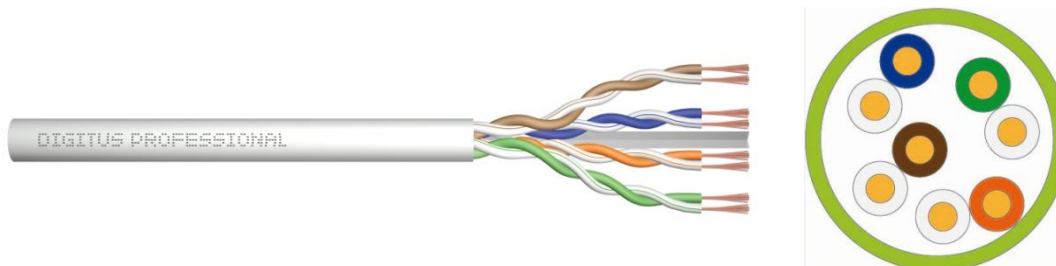

Abstract

CAT 6 Class E, U/UTP, Twisted Pair Patch Cable, Raw, AWG 26/7, LSZH, 250 MHz

Application areas

Primary (Campus), Secondary (Riser), Tertiary (Horizontally)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T
IEEE 802.5: 16 MB; ISDN; FDDI; ATM; PoE+

Norms

ANSI/TIA 568-C; ISO/IEC 11801 2nd Ed.; EN 50173; EN 50288-6-1

FRNC (flame retardancy)

IEC 60332-1; IEC 60754-2; IEC 61034

Physical Properties

Conductor	Bare annealed copper, stranded AWG 26/7
Insulation	HD-PE (High Density Polyethylene)
Total number of insulated conductors	8, twisted in 4 pairs
Color code	Blue-white, orange-white, green-white, brown-white
Individual pair shielding	None; incl. plastic cross separator
Overall shielding	None
Outer sheath	LSZH
Outer sheath diameter	0.55 mm nominal
Outer sheath color	Grey

Mechanical Properties

Tensile loading	150 N max.
Dynamic bending radius	8x AD mm min.
Static bending radius	4x AD mm min.
Shipping- and storage temperature range	-10 °C up to +75 °C
Operating temperature range	-10 °C up to +60 °C
Installations temperature range	0 °C up to +50 °C
Overall diameter	5.0 mm nominal
Flame retardancy	IEC 60332-1 (LSZH-1/FRNC-B)
Halogen free & smoke-proof	IEC 60754-2 & IEC 61034

Electrical Properties

DC loop resistance	$\leq 280 \Omega \text{ km}$
Resistance unbalance	$\leq 2\%$
Insulation resistance	$\geq 2000 \text{ M}\Omega/\text{km @ 500V}$
Capacitance	nom. $48 \text{ nF/km @ 800 Hz}$
Capacitance unbalance (pair-ground)	$\leq 1500 \text{ nF/km}$
Characteristic Impedance	$100 \pm 15 \Omega \text{ @ 10-100 MHz}$
NVP	67%
Propagation delay	nom. $\leq 555 \text{ ns/100 m}$
Delay skew	nom. $\leq 50 \text{ ns/100 m}$
Test voltage (DC 1 min) core/core	1000V
Coupling attenuation	$\geq 4 \text{ dB}$

Transmission Properties

FREQ.	ATT	NEXT	PS NEXT	RL	ACR	PS ACR	ELFEXT	PS ELFEXT
MHz	dB	dB	dB	dB	dB	dB	dB	dB
10	6.3	56.6	54.0	19.0	43.3	40.3	43.3	40.3
100	21.3	39.9	37.1	12.0	23.3	20.3	23.3	20.3
200	31.5	34.8	31.9	9.0	17.2	14.2	17.2	14.2
250	35.9	33.1	30.2	8.0	15.3	12.3	15.3	12.3

Product Number Information

Item code	Length	Packaging
DK-1613-P-1	100 m	Carton
DK-1613-P-305	305 m	Carton