


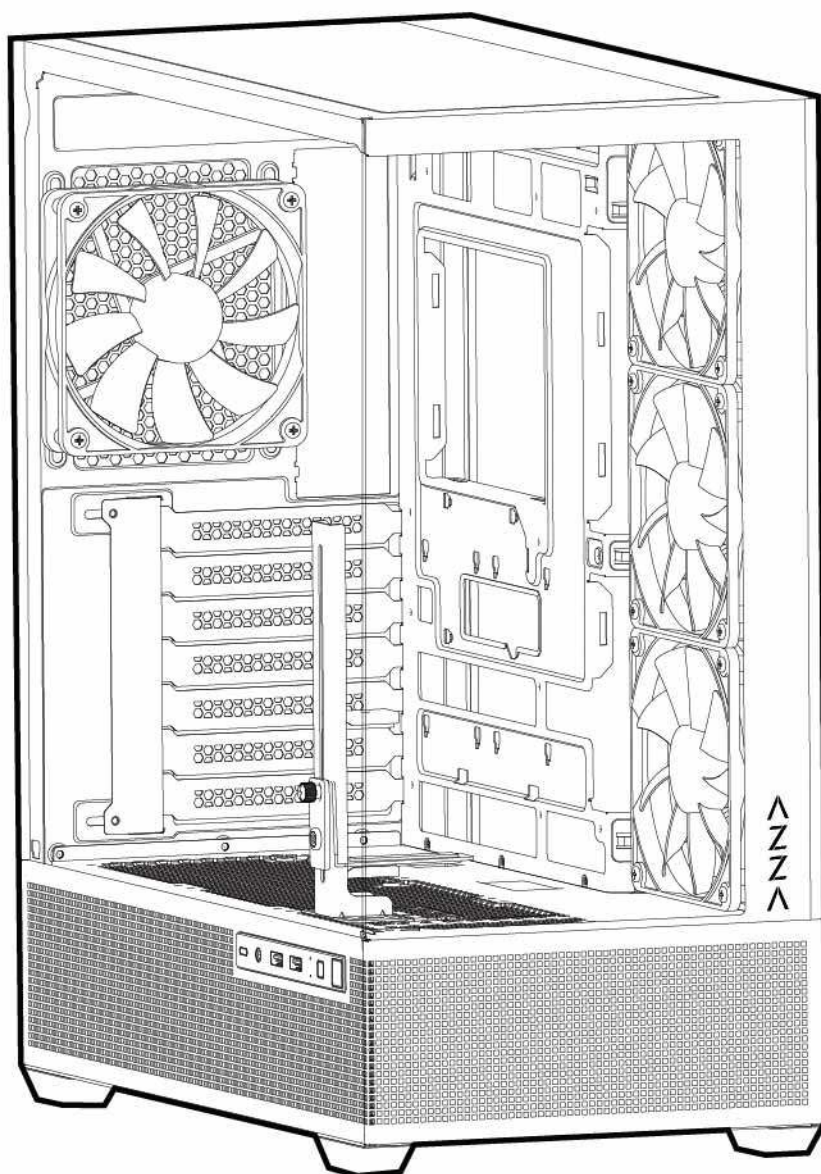

TIARA


USER MANUAL

- 1.Specifications
- 2.Chassis Parts
- 3.Control Panel Functions
- 4.3.5"/2.5" HDD/SSD Installation
5. Remove the Glass Panel
6. Cooling System Installation
7. Fan Installation
8. RGB Lighting Switching
9. ARGB IC Board Installation

Specifications


Model	
Model Name:	Tiara
Model Number:	CSAZ-501W, CSAZ-501B
Specifications	
Type:	ATX Mid Tower
Color:	White / Black
Side Panel Window:	Side panel: Tempered Glass
Max CPU Cooler Height:	UP to 170 mm
Max Video Card Length:	Up to 400 mm long video card Wide<155mm
Power Supply:	Not included
Motherboard Compatibility:	ATX(Back-connect supported) 、Micro ATX 、ITX
Expansion	
External 5.25" Drive Bays:	0
Internal 2.5" Drive Bays:	Up to 4
Internal 3.5" Drive Bays:	Up to 2
Expansion Slots:	7
Top Ports:	Power button, LED button, Combo HD Audio, USB 3.0 x 2, Type C x1
Physical Dimension	
Physical Dimension(HxWxD)	482x225x420mm/19x8.9x16.5 inches
Weight:	6.38kg / 14lbs
Features	
Addressable RGB Light Effects:	Addressable RGB devices connected to the ARGB&PWM control board can be controlled with the LED button or motherboard lighting software.
Available Fan Ports:	3x120mm on the mb side (3x120mm LFO-5612DR ARGB&PWM Fan included) 3x120mm or 2x140mm fan ports on the top 1x120mm fan port in the rear (1x120mm LFO-5612D ARGB&PWM Fan included) 3 x 120 mm fan ports on the PSU shroud
Water Cooling:	Supports radiators up to 240/280mm on the Side Supports radiators up to 280/360mm in the Top
Dust Filters:	Removable (magnetic) dustproof net on the top , dust filter on bottom of chassis.
Power Supply Support:	Bottom mounted ATX Power Supply
Accessories:	VGA Holder

Chassis Parts

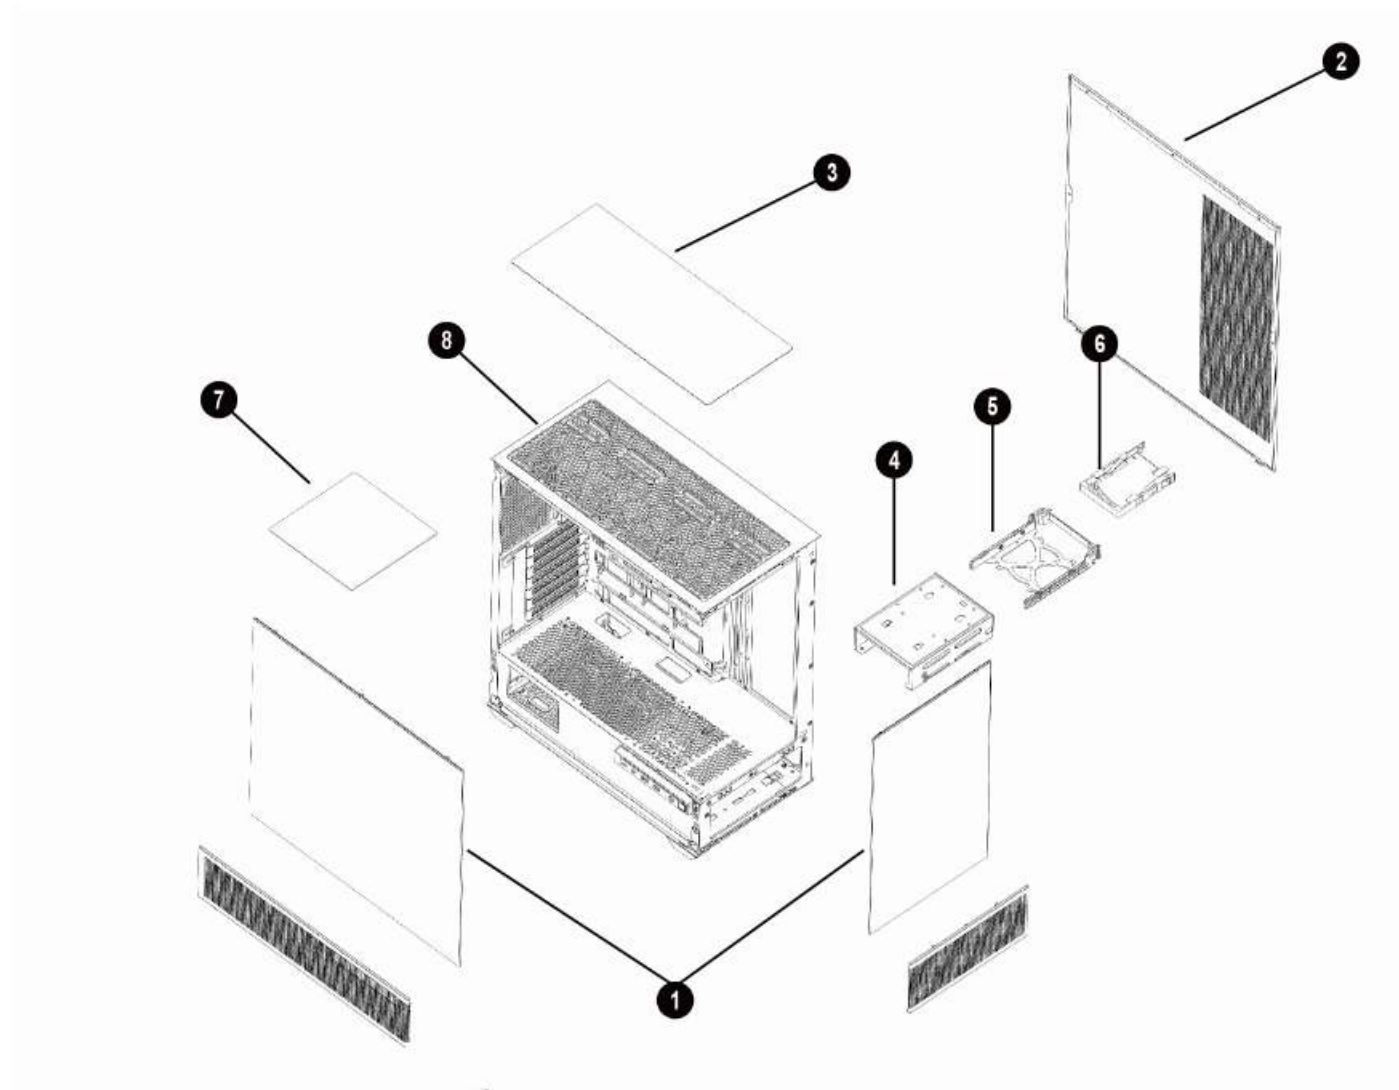


1	Tempered glass panel
2	Metal side panel
3	Removable magnetic mesh
4	Hard disk cage
5	3.5"HDD/ 2.5"SSD brackets
6	2.5"SSD metal tray
7	Dust filter mesh
8	Chassis

Control Panel Functions

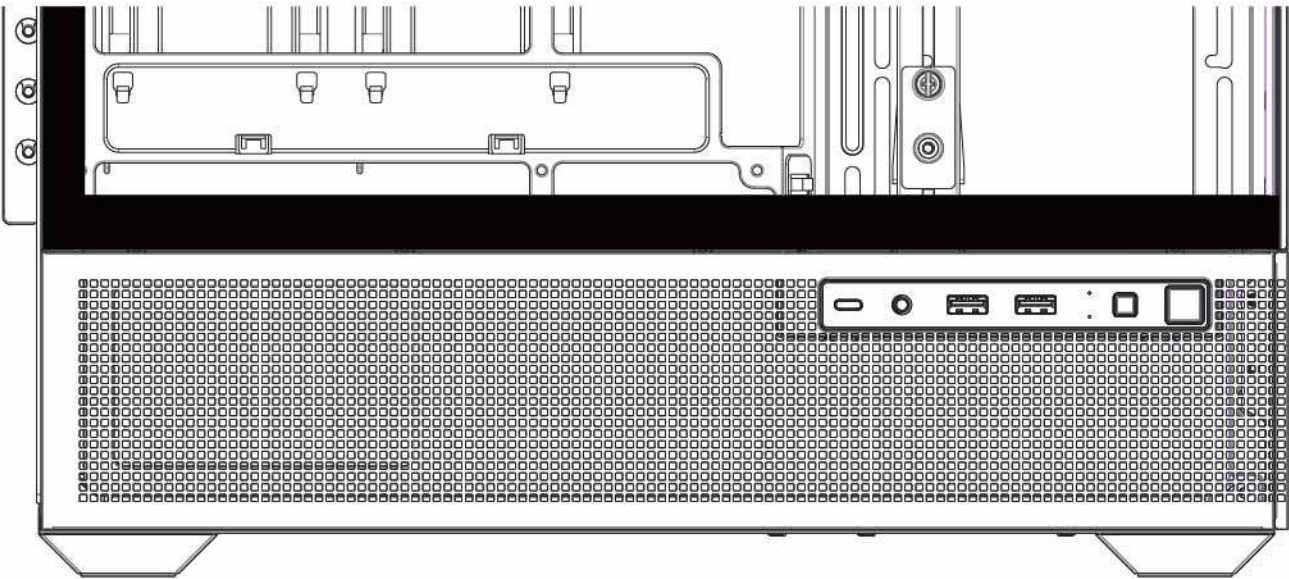

	POWER		USB 3.0
	LED		USB 3.0
	Combo HD Audio		Type C


3.5 "/ 2.5" HDD/SSD Installation

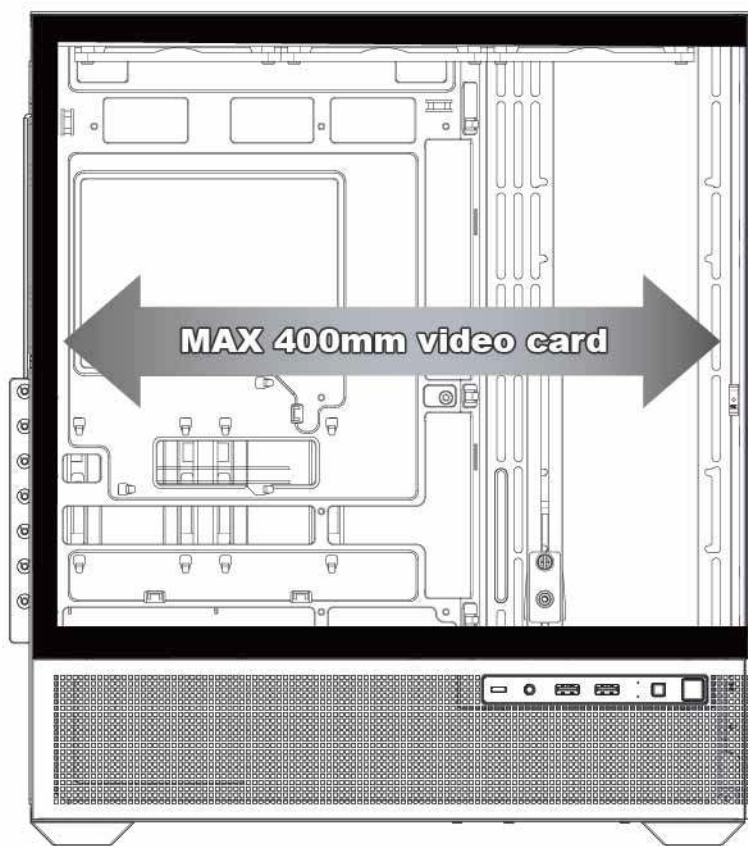

- Up to 400 mm long video card , wide<155mm




or

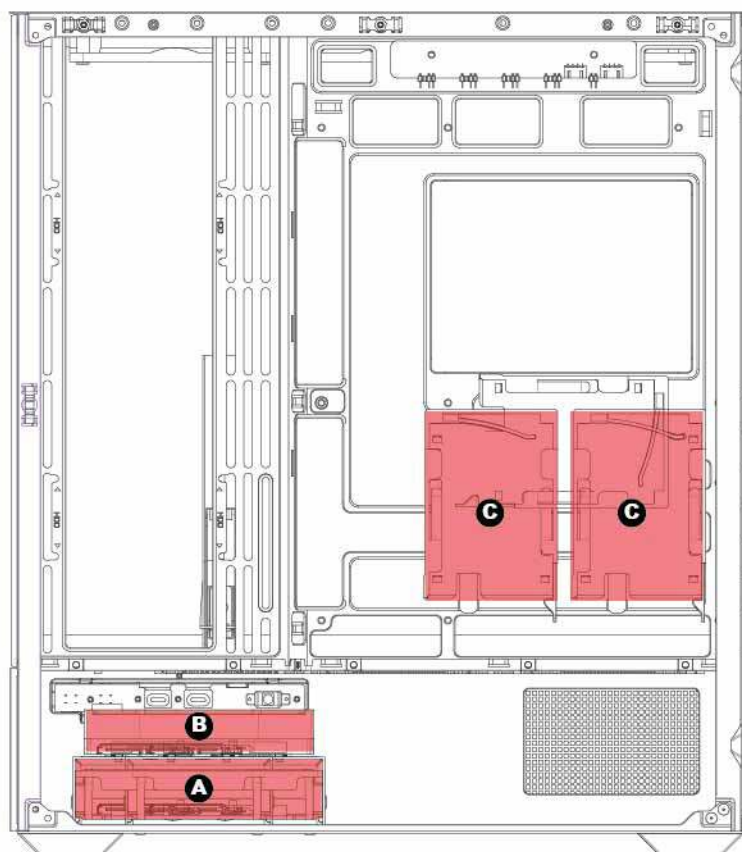


- Multifunctional hard disk bracket supports 3.5" HDD x 1 or 2.5" SSD x1 (**A**)
- 2.5" SSD metal tray support 2.5"SSD x2 (**C**)
- Multifunctional hard disk cage supports 3.5" HDD x 1 or 2.5" SSD x 1(**B**)

Remove the glass panel

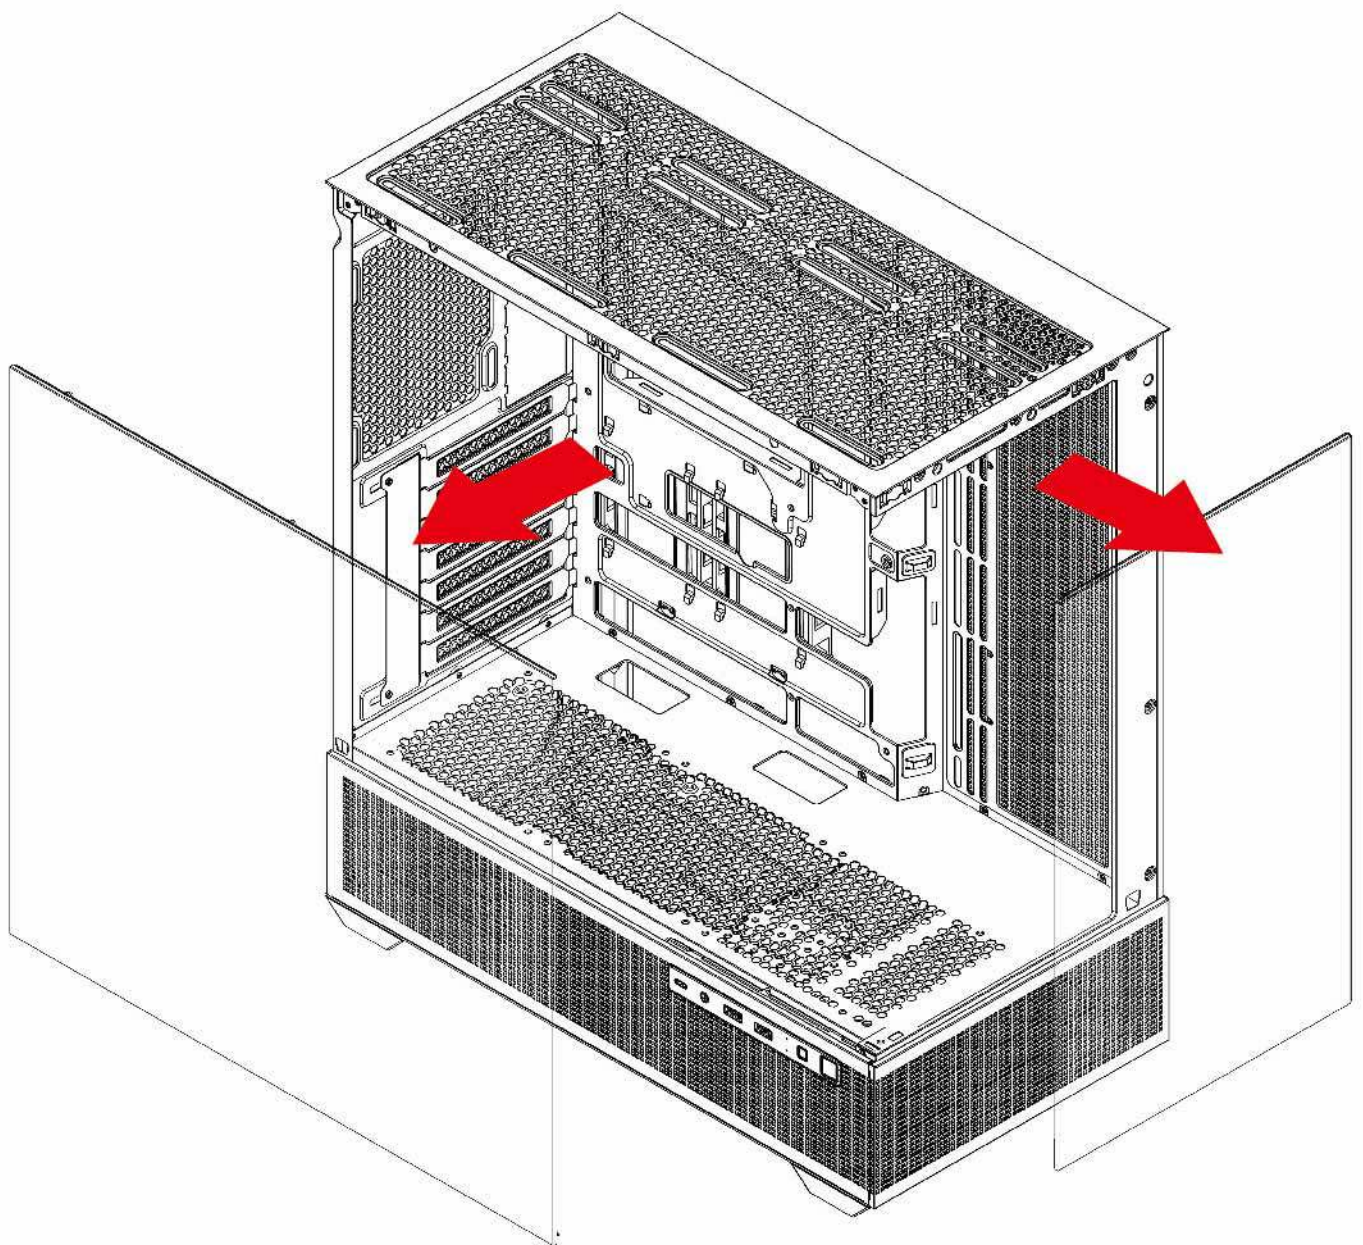


Top





120mm x3

or





140mm x2

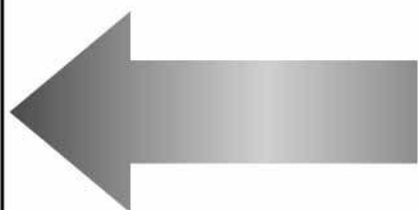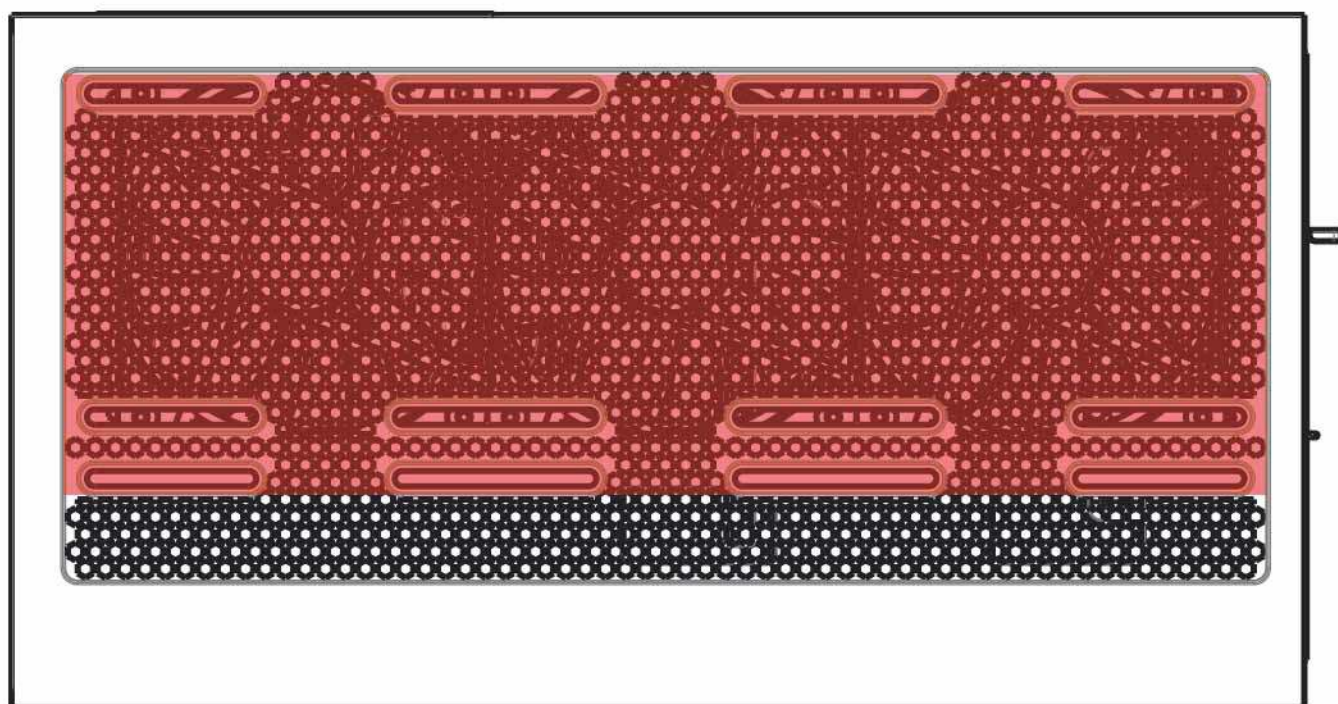

Max Length of
Radiator
360mm




Rear

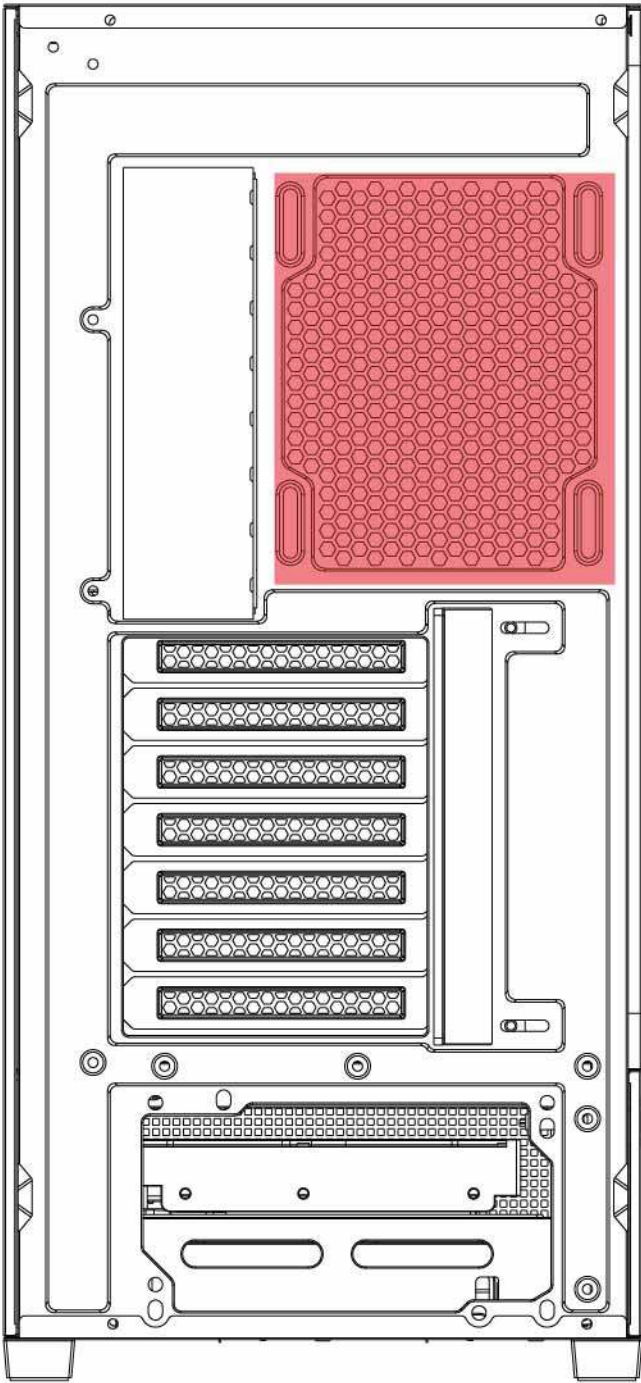


120mm x1

Side




120mm x3



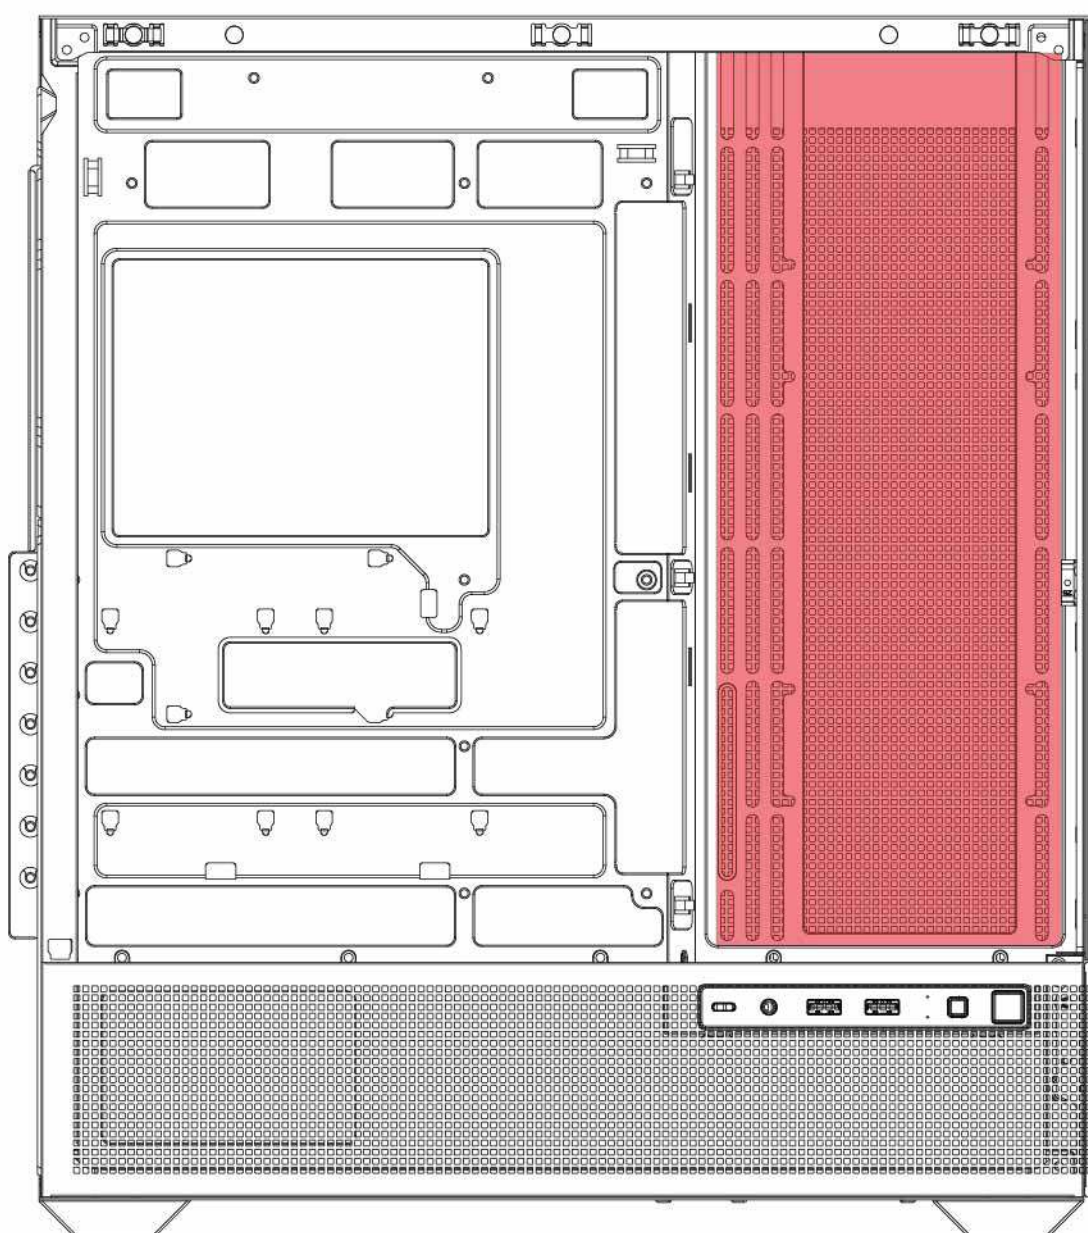


Max Height of
Radiator
280mm

Fan Installation




120mm x1

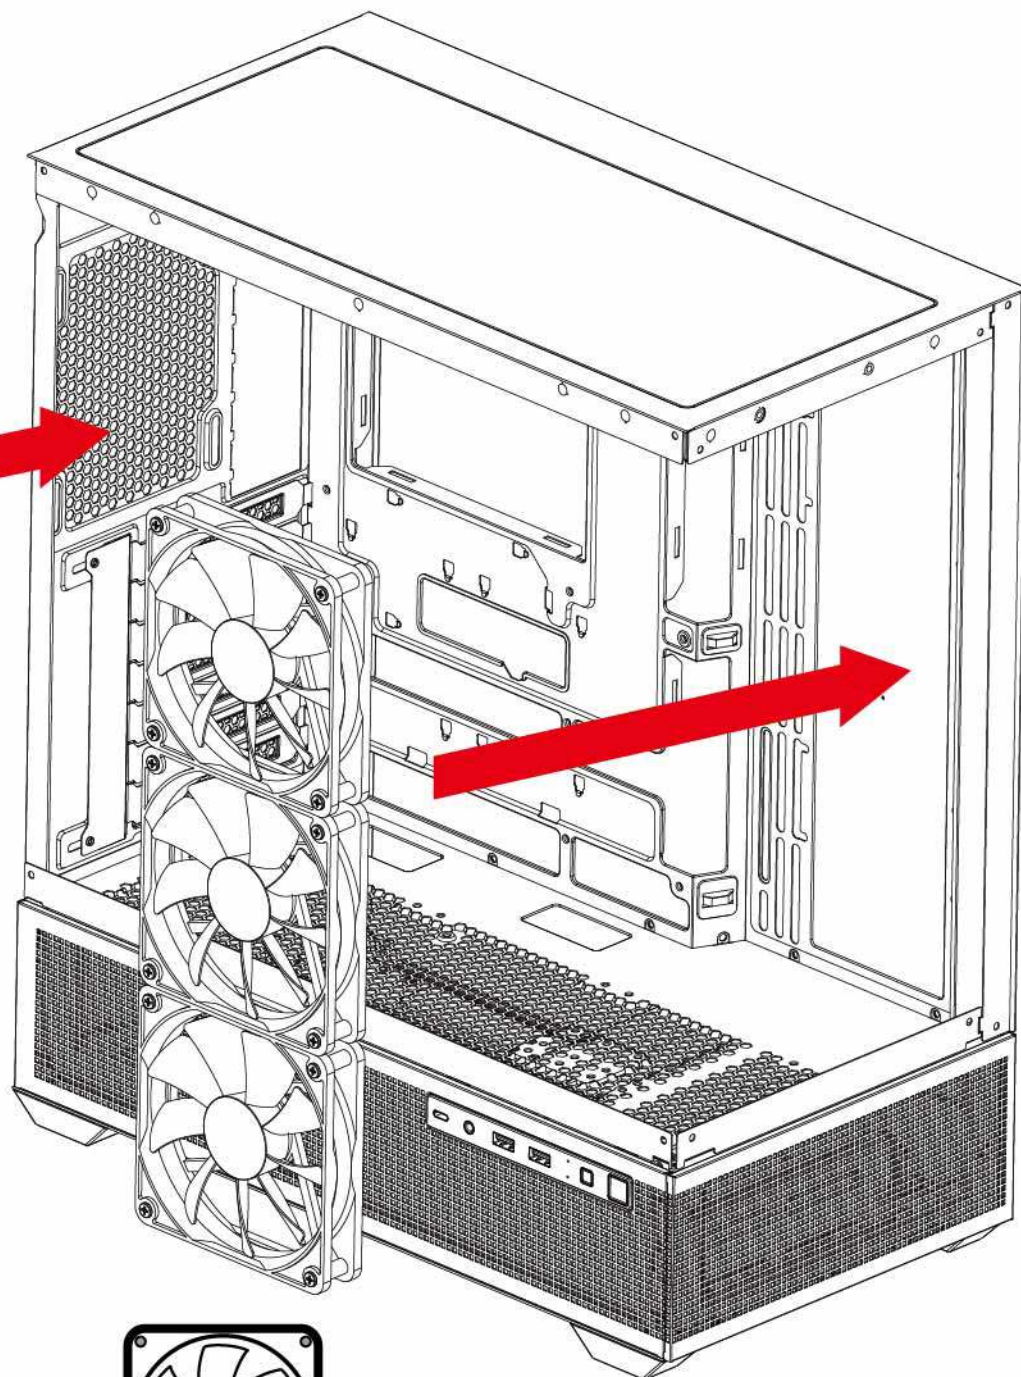

120mm x3

■ 3x120mm fan ports
on the mb side



Fan Installation

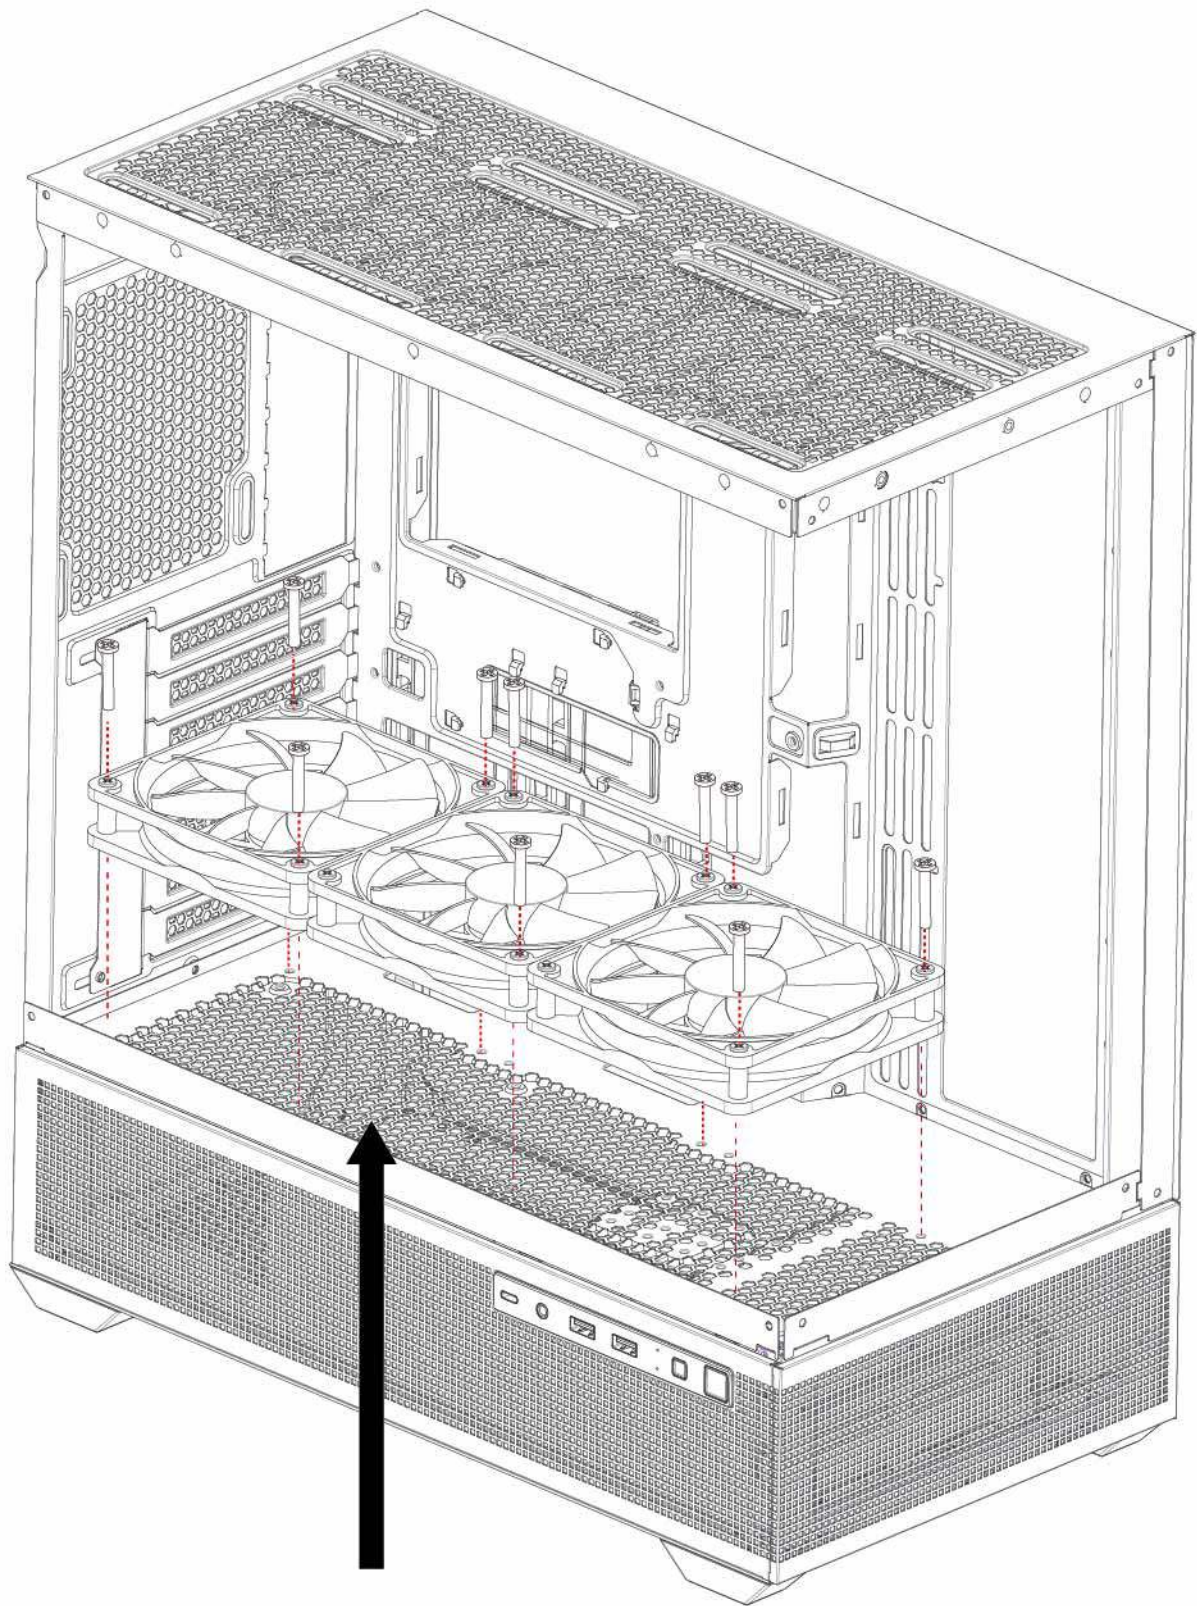






3x120mm fan ports on the Power Supply Shroud

RGB Lighting Switching

- Press the LED button to cycle through different RGB lighting modes.

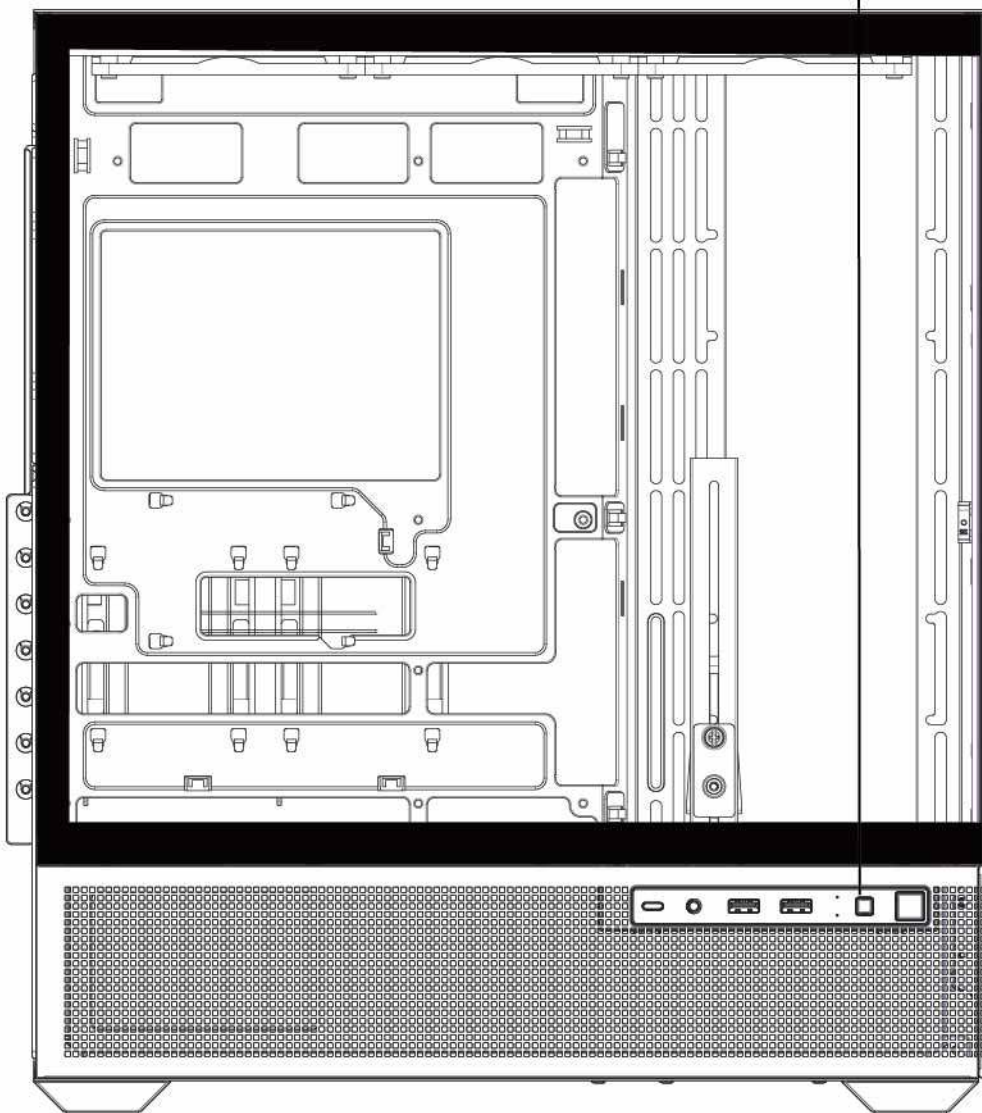

ARGB IC Board Installation

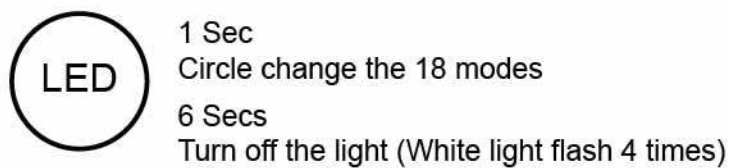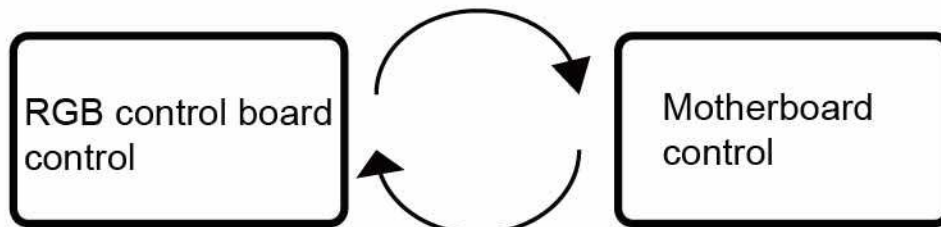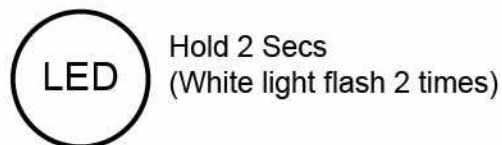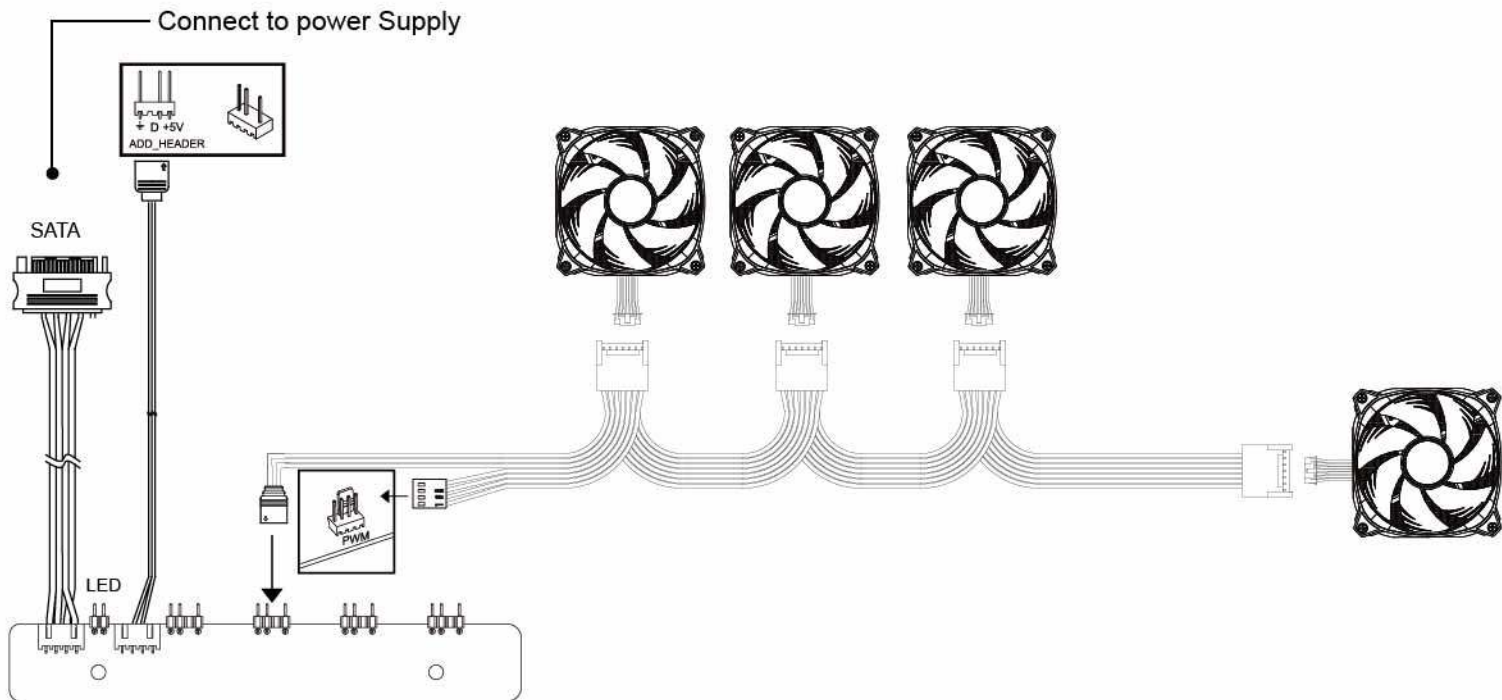

RGB control board and motherboard RGB lighting modes support the Power-off memory lighting effect function.