



Mercury 7 Dome Camera

1080P WDR Hybrid Analogue


Item no.: 0070-1322A



KEY FEATURES

- 1/2.8" Progressive Scan CMOS
- 2.8~12mm motorized lens
- Max 30fps@1080P
- Video transmission 300m
- IR distance up to 30m
- 3D DNR, WDR, ICR, BLC, GLOBAL
- Support AHD/TVI/CVI/CVBS Output
- IP66, IK10

DIMENSIONS (MM)

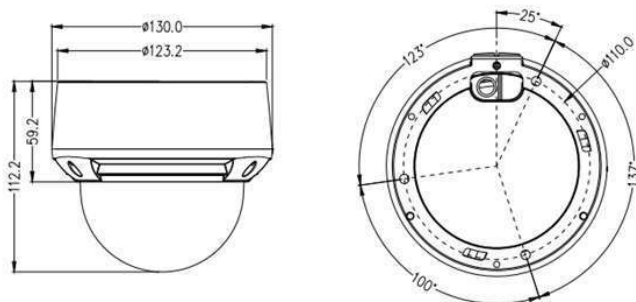

ACCESSORIES



0070-11811
Junction Box



0070-11821
Pendant Cap



0070-11841
Pendant Mount



0070-11831
Wall Mount



0070-11832
Wall Mount



0070-11852
Pole Mount



0070-11861
Corner Mount



MERCURY 1080P WDR HYBRID ANALOGUE

Mercury 7 Dome Camera

1080P WDR Hybrid Analogue



SPECIFICATION

CAMERA

Image Sensor	1/2.8" Progressive Scan CMOS
Signal System	PAL/NTSC
Electronic Shutter	Auto, PAL:1/25-1/10000s, NTSC:1/30-1/10000s
Min. illumination	Color: 0.001 Lux @ (F1.2, AGC ON), B/W: 0 Lux @ (IR LED ON)
S/N Ratio	More than 50dB
IR Distance	Up to 30 m (98.4 ft)
IR LEDs	15pcs
OSD Joystick	Support
Up the Coax	Support
Pan/Tilt/Rotation Range	Pan:0°~355°, Tilt:0°~80°, Rotation:0°~355°

LENS

Lens Type	Motorized focus
Iris	Fixed Iris
Focal Length	2.8 ~ 12mm
F Number	F1.6
Angle of View	H: 94.9° ~ 37.1°, V: H: 50.2° ~ 20.8°

VIDEO

Resolution	1080P (1920×1080)
Frame Rate	PAL: 25fps, NTSC: 30fps
Video Output	Support AHD/TVI/CVI/CVBS Output
Day/Night	Auto / Color / B&W / Ext
OSD Menu	Support
Wide Dynamic Range	WDR, EXT/OPEN/CLOSE
Gain Control	Auto
Noise Reduction	3D DNR, AUTO/MANUAL(0-30)
White Balance	Auto
BLC	Support

GENERAL

Power Supply	DC12V±10%
Power Consumption	Max. 4W (12V DC, IR ON)
Operating Temperature	-10 °C ~ 55 °C (14°F ~ 131 °F)
Operating Humidity	Less than 85% RH
Ingress Protection	IP66, IK10
Certifications	CE/FCC
Casing	Metal
Dimensions	130×112mm (5.12" × 4.41")
Net Weight	0.67 kg (1.48 lb)