


SPW-150

The **SPW-150** siren is used for acoustic signaling of alarm events within a protected facility. The built-in emergency power supply ensures that **SPW-150** is able to sound alarms even when it is disconnected from the alarm control panel.

- acoustic alarm: piezoelectric transducer
- tamper protection against opening / detaching from the mounting surface
- emergency power supply with 9V battery

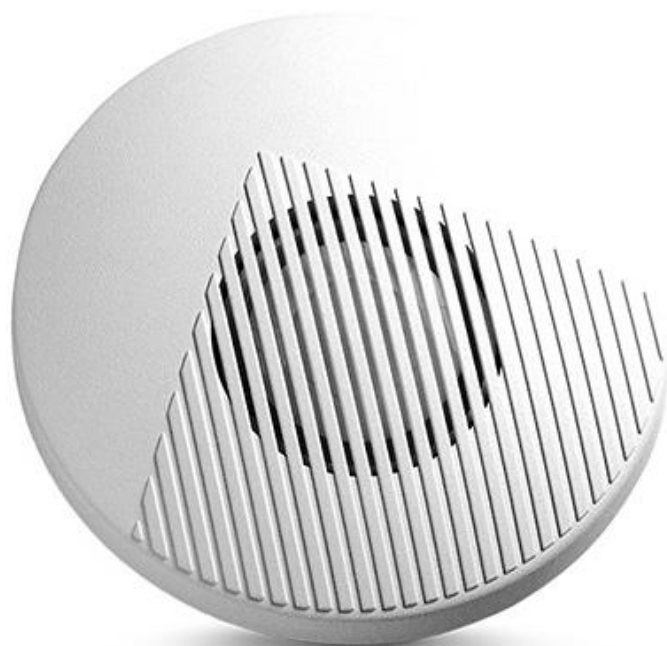

Supply voltage	12 V DC
Operating temperature range	-10...+55°C
Max. current consumption	330 mA
Weight	162 g
The intensity of sound	up to 120 dB
Maximum humidity	93±3%
Standby current consumption	10 µA
Dimensions	130 x 130 x 40 mm
Environmental class according to EN50130-5	II
Complied with standards	EN50130-4, EN50130-5
Emergency power supply	bateria alkaliczna 6LR61 9V