

# Fanvil PN8 2-Wire PoE Switch

Fanvil



## Description

Fanvil PN8 is a 2-wire PoE switch featuring a unique design that facilitates the reuse of existing wires. It requires no cumbersome installation or wiring, simply plug it in and it's ready to use. This not only saves installation time but also significantly reduces overall wiring costs. This innovative feature makes PN8 an ideal choice for quick and efficient deployment in existing infrastructure, providing users with a more convenient and cost-effective experience.

## Main Features



Plug-and-Play. Support network and power supply for 2-wire devices, with a transmission distance of up to 300 meters



Reuse existing wires (PSTN & RVV cables) to save wiring costs




Cascade via Ethernet cables for a more stable transmission



Built-in power supply, supports 100~240V wide voltage input



Built-in mode switch

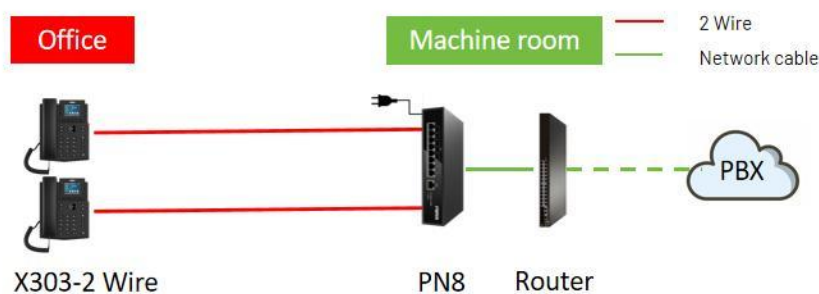

Fanvil Technology Co., LTD

Add: 10F, Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'An District, Shenzhen, China

Phone: 0755-26402199 E-mail: sales@fanvil.com Web: www.fanvil.com

## Specifications

|                         |                                                            |
|-------------------------|------------------------------------------------------------|
| Scenario                | Office, Community, Hotel, Renovation of an old building    |
| Body                    | Galvanized steel                                           |
| Color                   | Gunmetal                                                   |
| Network Interface       | RJ45                                                       |
| 2-Wire Interface        | 8                                                          |
| Reset                   | 1                                                          |
| Device Power Switch     | 1                                                          |
| Status Indicator Lights | Power indicator light<br>Network indicator light           |
| Power                   | 100-240V<br>54V 1.5A                                       |
| Transmission Distance   | 300M (Supply network and power)<br>CAT 5e, 24AWG,RVV 2*0.5 |
| Working Temperature     | -20°C~+50°C                                                |
| Storage Temperature     | -20°C~+70°C                                                |
| Installation            | Wall-mounted/Flush-mounted                                 |
| Weight                  | 11.33KG                                                    |
| Qty/CTN                 | 10 PCS                                                     |
| Product Size (LWH)      | 195*130*40mm                                               |
| Box Size (LWH)          | 310×66×156mm                                               |