




eConnect™

Item.no: see page 3

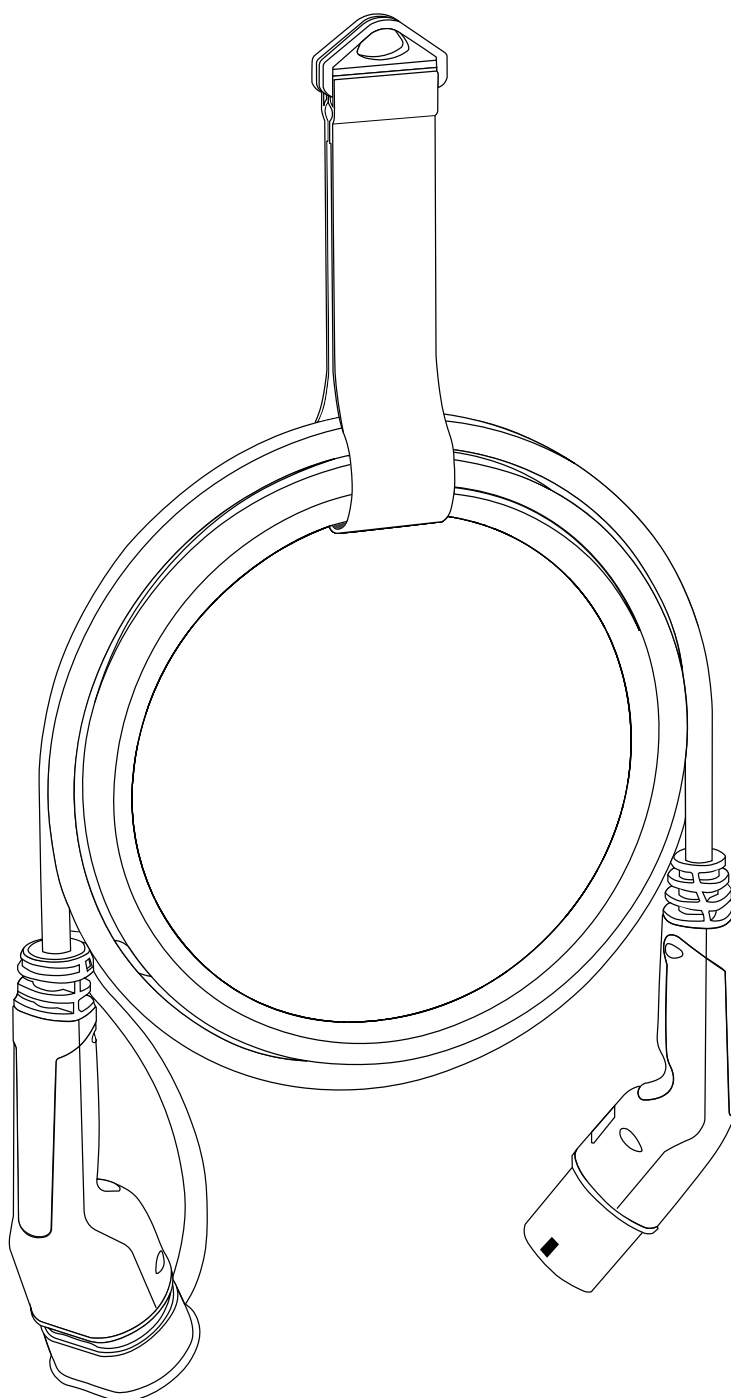

Type 2

eConnect™

Designed for extreme conditions

Premium charging cables made for performance, durability and unmatched user-friendliness in any conditions. eConnect cables can be used to charge all vehicles with a Type 2 interface.

Made for Nordic conditions:

eConnect cables remain soft and flexible, even in severe cold.

User-friendly:

eConnect cables are lightweight and have plugs with universal ergonomic design.

Durable:

Our robust cables and terminals are made for long term use.



Smart cap:

The retractable cap prevents it from collecting water and dirt during charging and from bumping into the car.

Environmentally friendly:

Our cables and plugs are recyclable

Accessories:

eConnect is available with a wide range of accessories.

Check defa.com for latest selection.

Specification

Ratings

See Item no. table

IP rating, connected/with end cap

IP44

Operating temperature [°C]

-40 to +55

Storage temperature [°C]

-50 to +85

Charging cable type

Mode 3

Connection to vehicle

Type 2 

Connection to charging station

Type 2 

Certification

IEC 62196-1, IEC 62196-2
DEFA is certified to the requirements of IATF 16949, ISO 9001, ISO 14001 and ISO 45001.

Recycling

EE-waste

eConnect is available in the following versions:

Item no. RED	Item no. BLACK	Current [A]*	Power [kW]*	Voltage [V~]*	Phase	Length [m]	Weight [kg]
711304	500904	20	4,6	250	1	5,0	1,4
711305	500905	20	4,6	250	1	7,5	1,8
711306	500906	20	13,8	480	3	5,0	2,1
711307	500907	20	13,8	480	3	7,5	2,7
711308	500908	32	7,4	250	1	5,0	1,9
711309	500909	32	7,4	250	1	7,5	2,4
711310	500910	32	22,0	480	3	5,0	3,1
711311	500911	32	22,0	480	3	7,5	4,0

*Maximum rating

The actual charge rate is also determined by the car and the charging station.