




2666 FK

**Diagonal Cutter with Tapered Head
and Ultra Lead Catcher 0.2 mm-1.25
mm**



PRODUCT DETAILS

- Handles in synthetic material with return spring
- Cutting capacity: 0.2-1.25 mm to 0.3-1.6 mm of Cu wire
- High-performance alloy steel
- Mirror polished
- Precision cutting pliers, tapered head
- CNC grinding guarantees edge angle accuracy and contact, increasing reliability and consistency
- Precision induction hardened edges 63 HRC to 65 HRC
- Screw joint minimizes friction and maximizes alignment of cutting edges
- 2646RK with lead catcher
- 2646K, 2646AK, 2666FKK with lead catcher

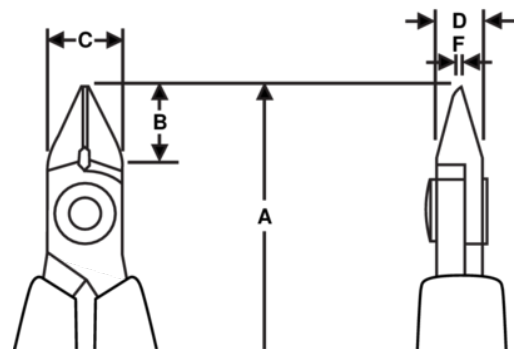

Follow the Fish!



PRODUCT ATTRIBUTES

Product	A	B	C	D	F			
2666 FK	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.2-1.25 mm	Ultra	49 g

