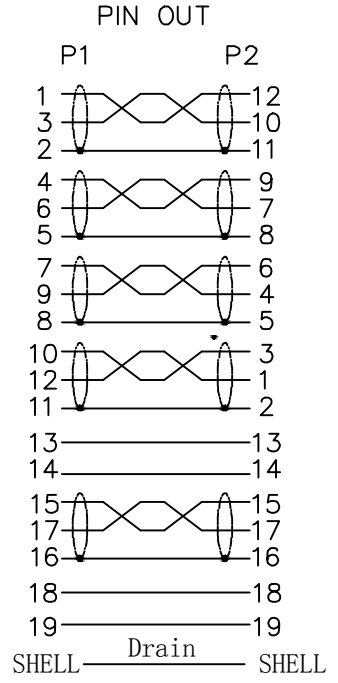
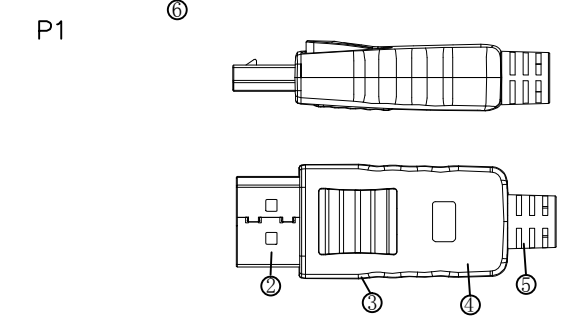
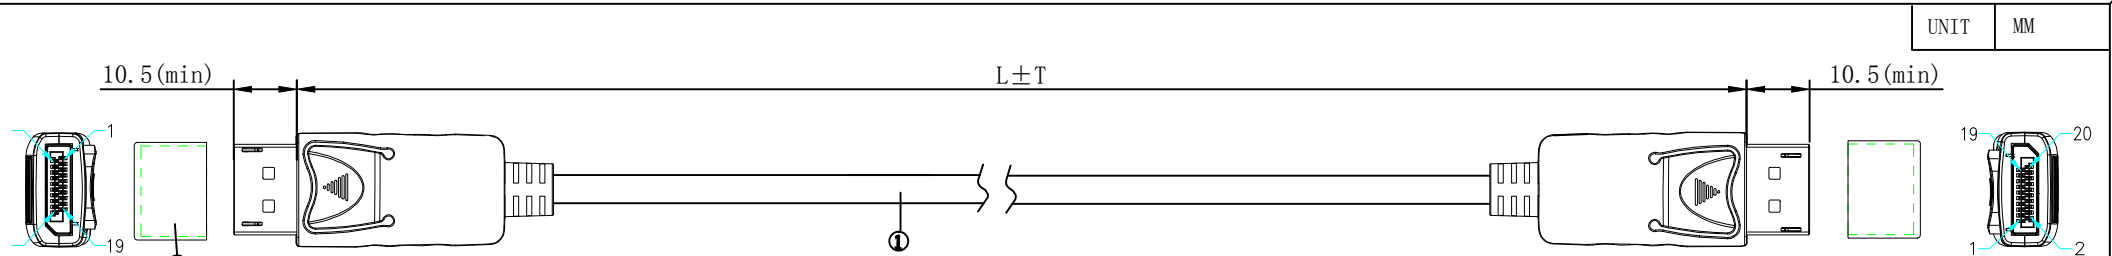


- NOTE:
- 1.Electrical test:
 - (1).100% open short & miss wire test;
 - (2).Insulation resistance:DC 300V 0.01s 10M ohm min;
 - (3).Contact resistance:3 ohm max; (5M 5 ohm max;)
 - 2.Computer + Monitor test
 - (1).Resolution:3840*2160@60Hz
 - 3.Marking:Display Port Cable
 - 4.RoHS(EU2015/863) and REACH Compliant

MATERIAL LIST:

⑥	Dust Cap	LD PE	2	
⑤	TUBE END	BLACK PVC 45P	2	
④	INNER COVER	LD PE	2	
③	OUTER COVER	DP 20PIN MALE BLACK ABS ASSEMBLY TYPE	2	
②	CONNECTOR	DP 20P/M WITH LATCHING SOLDER TYPE, BLACK INSULATION, THE PIN GOLD PLATED THE SHELL FOR Gold PLATED	2	
①	CABEL	[(28AWG BC)*1P+D+FAM]*5+(28AWG BC)+HDPE*4C+ADB TPE/BLACK JACKET, OD:7.3±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2020-04-09	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM No.	LENGTH
11.04.5984	5000±70
11.04.5985	7500±100
11.04.5986	10000±200

DESC. ROLINE DisplayPort v1.2 Cable, DP-DP, M/M, TPE

