


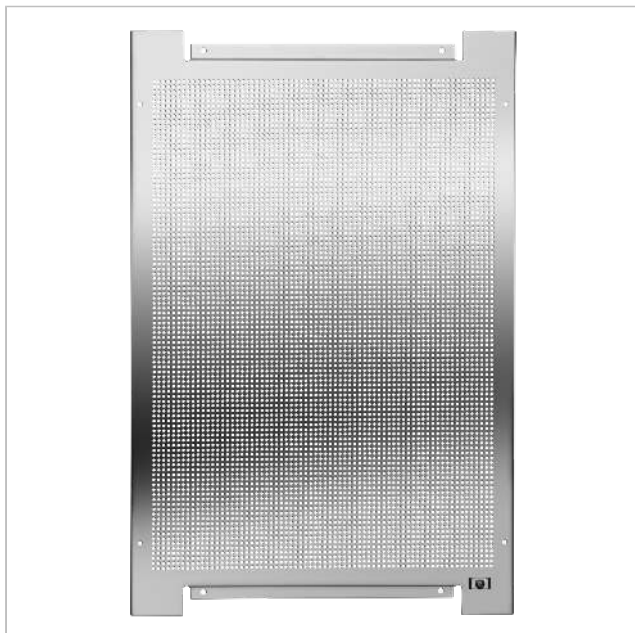

## Perforated Mounting Plate 400x600x19mm

Allows the installation of active or passive equipment, making them accessible. Facilitates product installation, enhancing the installation final appearance. The installer will be able to drive the input and output cables in any direction.

|                     |               |
|---------------------|---------------|
| <b>Ref.</b>         | 589402        |
| <b>Logical ref.</b> | MPTLP46       |
| <b>EAN13</b>        | 8424450185759 |

### Packing

|            |         |
|------------|---------|
| <b>Bag</b> | 1 pcs.  |
| <b>Box</b> | 10 pcs. |

### Physical data

|                     |            |
|---------------------|------------|
| <b>Net weight</b>   | 2,245.00 g |
| <b>Gross weight</b> | 2,245.00 g |
| <b>Width</b>        | 400.00 mm  |
| <b>Height</b>       | 600.00 mm  |
| <b>Depth</b>        | 19.00 mm   |

### Highlights

- Robust: made of galvanised steel.
- Ensures equipotential bonding of the metal equipment bolted on its perforated plate
- Easy bolting: 19mm clearance from wall
- Material thickness (steel): 1.5 mm
- 3mm punch-holes (for plate screws)

- Includes anchoring system for grounding connection

Technical specifications : Ref. 589402

|                   |    |       |
|-------------------|----|-------|
| Installation type |    | Wall  |
| Material          |    | Steel |
| Thickness         | mm | 1.5   |
| Colour            |    | Inox  |
| Height            | mm | 600   |
| Width             | mm | 400   |
| Depth             | mm | 19    |