

ZYXEL

Zyxel XGS1250-12 Managed L2 10G Ethernet (100/1000/10000)
Grey

Brand : Zyxel

Product code: XGS1250-12-ZZ0102F


Product name : XGS1250-12

12-Port Web-Managed Multi-Gigabit Switch includes 3-Port 10G and 1-Port 10G SFP+
Zyxel XGS1250-12. Switch type: Managed, Switch layer: L2. Basic switching RJ-45 Ethernet ports type: 10G Ethernet (100/1000/10000), Basic switching RJ-45 Ethernet ports quantity: 11. Full duplex. MAC address table: 16000 entries, Switching capacity: 96 Gbit/s. Networking standards: IEEE 802.3, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3an, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x. Power connector: DC-in jack. Wall mountable



Management features		Multicast features	
Switch type *	Managed	Multicast support	✓
Switch layer	L2	Design	
Quality of Service (QoS) support	✓	Rack mounting *	✗
Web-based management	✓	Stackable *	✗
MIB support	✓	Product colour	Grey
Ports & interfaces		Housing material	Aluminium, Iron
Basic switching RJ-45 Ethernet ports quantity *	11	Reset button	✓
Basic switching RJ-45 Ethernet ports type *	10G Ethernet (100/1000/10000)	LED indicators	✓
SFP+ module slots quantity	1	Redundant fans support	✓
Power connector	DC-in jack	Wall mountable	✓
Network		DIN rail mounting	✗
Networking standards *	IEEE 802.3, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3an, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x	Number of fans	1 fan(s)
10G support *	✓	Power	
Port mirroring	✓	Power source *	AC
Full duplex	✓	Power supply included *	✓
Flow control support	✓	AC input voltage	100 - 240 V
Link aggregation	✓	AC input frequency	50/60 Hz
Broadcast storm control	✓	Power consumption (max)	20.06 W
Auto MDI/MDI-X	✓	Power over Ethernet (PoE)	
Ethernet LAN data rates	10,100,1000,2500,10000 Mbit/s	Power over Ethernet (PoE) *	✗
VLAN support	✓	Operational conditions	
Data transmission		Operating temperature (T-T)	0 - 40 °C
Switching capacity *	96 Gbit/s	Storage temperature (T-T)	-40 - 70 °C
		Operating relative humidity (H-H)	10 - 90%
		Storage relative humidity (H-H)	10 - 90%

Data transmission		Weight & dimensions	
Forwarding rate	71.42 Mpps	Width	250 mm
MAC address table *	16000 entries	Depth	104 mm
Jumbo frames support	✓	Height	27 mm
Jumbo frames	12000	Weight	783 g
Security		Logistics data	
DHCP features	DHCP client	Harmonized System (HS) code	85176990
IGMP snooping	✓		

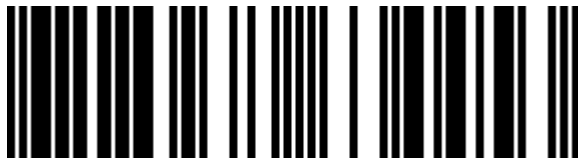

4718937634453

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.