



## M.2 External Storage

# RVS03

### 10Gbps SuperSpeed USB-C 3.2 Gen2 to NVMe / SATA M.2 SSD enclosure

- USB 3.2 Gen2 Type-C interface up to 10Gbps SuperSpeed transfer rate
- Support various lengths of M.2 SSD (22x30mm, 22x42mm, 22x60mm, 22x80mm)
- USB bridge allows auto switch from USB-to-PCIe mode or USB-to-SATA mode
- Support TRIM command set
- Compliant with PCI Express Base Specification Rev. 3.0
- Compliant with NVMe Express Base Specification Rev. 1.3
- Support SATA host in Gen3 speed and full backward compatibility for SATA Gen2 / Gen
- Support Bulk Only Transfer (BOT) and USB Attached SCSI Protocol (UASP)
- Screw-free, tool-less aluminum alloy casing



### Specifications

|                 |                                                   |
|-----------------|---------------------------------------------------|
| Model No.       | SST-RVS03                                         |
| Color           | Black                                             |
| Material        | Aluminum, plastic                                 |
| Application     | USB 3.2 Gen2 Type-C NVMe / SATA M.2 SSD           |
| Controller      | Realtek RTL9210B-CG                               |
| Drive interface | NVMe or SATA M.2                                  |
| LED indicator   | Powered: Solid Blue<br>Data access: Blinking Blue |
| USB cable       | USB-C to USB-C                                    |
| Net weight      | 52.2g                                             |
| Dimension       | 105.7mm (W) x 13.5mm (H) x 35mm (D)               |





**USB 3.2 Gen2 Type-C interface up to 10Gbps SuperSpeed transfer rate**



# SILVERSTONE

**Support various lengths of SATA  
/ NVMe M.2 SSD (22x30mm,  
22x42mm, 22x60mm, 22x80mm)**

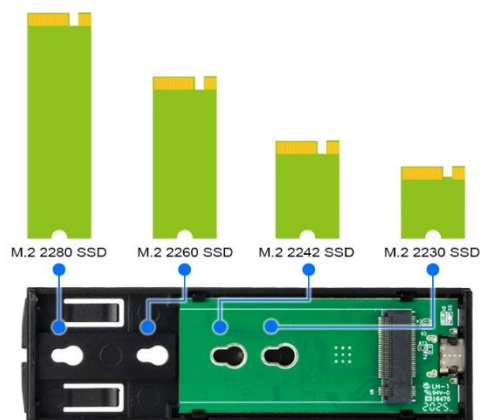

## Ease of installation

Simple tool-free design allows for complete installation in just 2 steps.



|                                           |             |              |                  |
|-------------------------------------------|-------------|--------------|------------------|
| CrystalDiskMark 8.0.0 x64 [Admin]         |             |              |                  |
| File Settings Profile Theme Help Language |             |              |                  |
| All                                       | 3           | 1GiB         | D: 0% (0/931GiB) |
|                                           |             |              | MB/s             |
| SEQ1M Q8T1                                | Read (MB/s) | Write (MB/s) |                  |
|                                           | 1041.89     | 976.01       |                  |
| SEQ1M Q1T1                                | 883.77      | 759.17       |                  |
| RND4K Q32T1                               | 220.81      | 202.67       |                  |
| RND4K Q1T1                                | 37.51       | 70.92        |                  |
| X570+R7-3800X+980PRO                      |             |              |                  |

